

# Delta DRS1000 Non-contact Speed Sensor Specifications

## Output

- 0 to 5 V square wave, differential or single ended
- 62.1 pulses for every kilometer per hour of speed measured
- 100 pulses for every mile per hour of speed measured

## Speed Range

- 0.8 km/h to 480 km/h
- 0.5 mph to 300 mph

## Temperature Range

- -17 to 60° C
- 0 to 140° F

## Total Unadjusted Error

- $\pm 0.34\%$  at 1 km/h\*

\*Error increases 0.0014% for every 1 km/h increase in speed. For example, at 2 km/h, the error increases to  $\pm 0.003414$ . At 100 km/h, the accuracy is  $\pm 0.48\%$

- $\pm 0.34\%$  at 1 mph\*


\*Error increases 0.0023% for every 1 mph increase in speed. For example, at 2 mph, the error increases to  $\pm 0.3423\%$ . At 60 mph, the accuracy is  $\pm 0.48\%$ .

Overall accuracy of the speed measurement is also influenced by external factors which may include sensor alignment, vibration, clutter, etc.

## Wiring

- Red = + power; Black = - power
- Green = + signal; White = - signal

## Maximum Target Distance

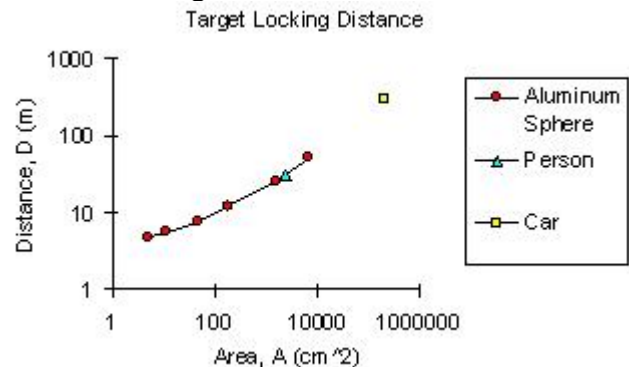

Maximum target distance is determined by the size and shape of the target. The sensor can see a normal size car at about 300 meters (1000 feet)

## Microwave Characteristics

- Frequency: Ka Band ( $35.4 \pm 0.1$  GHz)
- Beam Divergence Angle: 6° from center
- Average RF Power: 0.02 W maximum
- Effective Radiated Power: 0.98 W

## Sensor Response

- Update Period: 0.01 seconds
- Locking Latency: 0.02 seconds
- Unlocking Latency: 0.05 seconds
- Sensor Time Constant: 0.025 seconds

## Enclosure

- Weather Resistant

## Power Supply

- 10.5 to 16.4 VDC, 2.4 W

## Weight

- 230g (0.5 lbs.)

 **GMH Engineering**  
336 Mountain Way Dr, Orem, UT 84058  
(801) 225-8970 [www.gmheng.com](http://www.gmheng.com)

© 2011, GMH Engineering. All rights reserved. Specifications are subject to change without notice. Information furnished by GMH Engineering is believed to be accurate and reliable. User assumes full responsibility for the use of any or all information presented herein.